

HOPEWIND

Stock Code: SSE-603063



Wind Power Generation System

Product Catalog

www.hopewind.com



Company Profile 04

Wind Power Products 06

Overview of Wind Power Converters

Doubly-Fed Converters

Full-Power Converters

Supporting Products 30

Pitch Control System

Mobile Test Platform-Multi-Functional Power

Grid Simulator

Remote O&M Products 40

hopeView Network Monitoring System

Special Functions

Featured Projects 46

About Hopewind

01 Renewable Energy Generation

Products cover 750kW~30MW wind power converters, 3kW~385kW PV grid-tied inverters and 3000kVA~9000kVA MV Transformer Station..



02 Energy Storage Systems

130kW~3.45MW power conversion system, 1MW~10MW PCS turnkey station as well as EMS and other equipment, which widely used in generation side, grid side,user side and microgrid side.



03 Green Hydrogen Production

500kW~20MW IGBT hydrogen production power supply and hydrogen production intelligent management system and other equipment, which can be applied to grid-connected and offgrid renewable hydrogen production.



04 Power Quality

Provide 1Mvar~140Mvar STATCOM products, which have been widely used in regional grids, wind power, photovoltaics, petrochemicals, coal, steel, oil fields and rail transit and other fields and industries.



05 Electric Drive

Provide a complete set of 0.75kW~22.4MW low-voltage and 4MVA~102MVA (single inverter) medium-voltage variable frequency drive solutions, widely used in metallurgy, petroleum and petrochemical, mining machinery, port cranes, distributed energy power generation, large-scale test platforms, marine equipment, textiles, chemicals, cement, municipal and other various industrial applications.



Shenzhen Hopewind Electric Co., Ltd. (Stock Code: 603063) focuses on the R&D, manufacturing, sales and services of renewable energy & electric drive products, including products for wind power generation, photovoltaic generation, energy storage, hydrogen production power supply products, Grid simulator, power quality and electric drive. Furthermore, Hopewind owns integrated independent R&D and testing platforms of high-power power electrical equipment and monitoring systems. Through innovation in technology and service, Hopewind continuously creates value for customers, and has become one of China's most competitive enterprises in the renewable energy field.





6 R&D and manufacturing bases

Shenzhen, Suzhou, Xi'an, Heyuan, Wuhan, Hungary

30+ global service bases

Deployed worldwide to provide comprehensive services for global customers

Headquarter Shenzhen

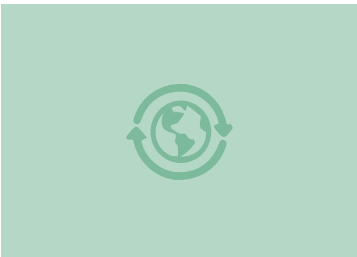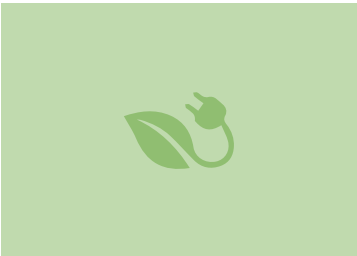

Wind Power Products

Overview of Wind Power Converters

Doubly-Fed Converters

Full-Power Converters


Product Overview

Wind energy is a clean and renewable energy source with significant environmental and economic benefits.

Wind power generation uses power converters to achieve variable-speed constant-frequency (VSCF) control of wind turbines. These converters transform the variable frequency and amplitude of the turbine’s electrical energy into a constant voltage and constant frequency (CVCF) through AC-DC-AC conversion.

Our wind power converters are categorized into doubly-fed converters and full-power converters. Doubly-fed converters are used with Doubly-fed Induction Generators (DFIG), while full-power converters are compatible with Permanent Magnet Synchronous Generators (PMSG), Electrically Excited Induction Generators (EEIG), and Squirrel Cage Induction Generators (SCIG).

Name	Voltage	Power	Cooling Mode	Applicable Model	Application Environment
Doubly-fed Converters	690V	1.5MW~6.XMW	Air Cooling	Doubly-fed Induction Generator	Standard Type Plateau Type Low Temperature Type Coastal Type Offshore Type
		2.0MW~6.XMW	Liquid Cooling		
	950V / 1140V	3.0MW~12.0MW	Air Cooling		
		5.0MW~20.0MW	Liquid Cooling		
	1800V	11.0MW~20.0MW	Liquid Cooling		
Full-power Converters	690V	1.0MW~12.0MW	Liquid Cooling	Direct-drive Permanent Magnet Generator	
	900V / 950V / 1140V	3.XMW~30.0MW		Medium / High-speed Permanent Magnet Generator	
	3300V	5.0MW~25.0MW		Electric Excitation Generator Squirrel-cage Induction Generator	

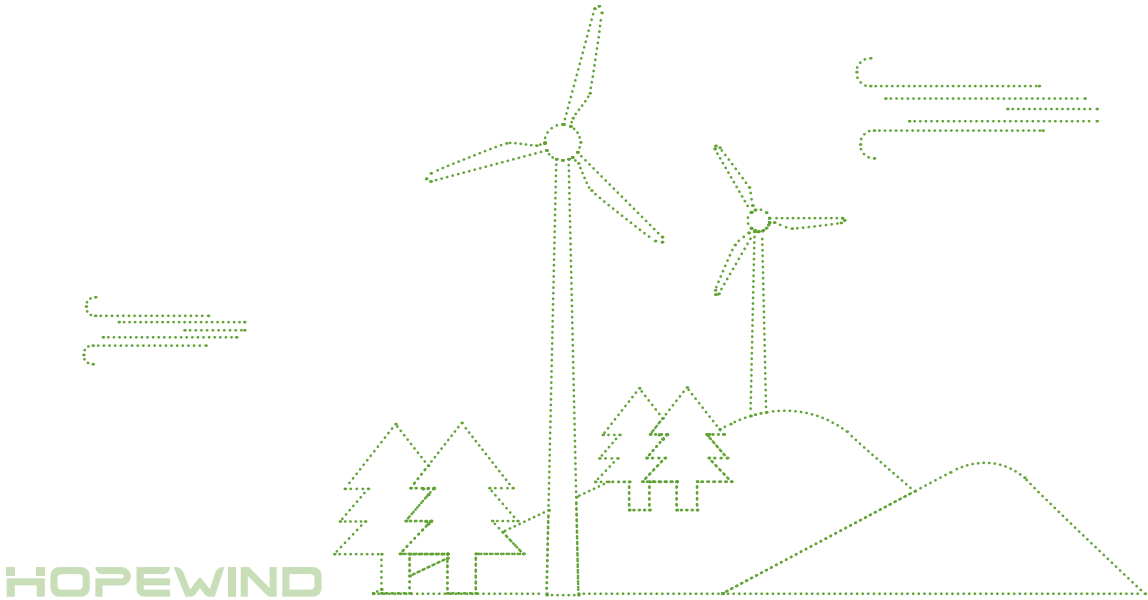

690V Doubly-Fed Converter

The Hopewind **HWDF069 Series Doubly-Fed Converters** are primarily used with doubly-fed generators in wind power generation systems to achieve optimal power generation efficiency and power quality. As the generator speed varies with wind speed, the converter adjusts the rotor's magnetic field by controlling its excitation. This ensures that the frequency, phase, and amplitude of the generator's output voltage match the grid, enabling variable-speed constant-frequency power generation. Additionally, the converter can regulate the generator's frequency, active power, and reactive power by modifying the frequency, amplitude, and phase of the rotor's excitation current.



Hopewind utilizes multiple patented technologies to provide doubly-fed wind power converters in a range of specifications, featuring a rated voltage of 690V and a rated frequency of 50Hz/60Hz. Hopewind owns complete independent intellectual property rights over these products.

- 1

■ Power Range


1.5MW, 2.0MW, 2.5MW
3.2MW, 3.6MW, 4.2MW
5.6MW, 6.25MW
- 2

■ Cooling Mode

Air Cooling
Liquid Cooling
- 3

■ Application Environment

Standard Type
Plateau Type
Low Temperature Type
Coastal Type

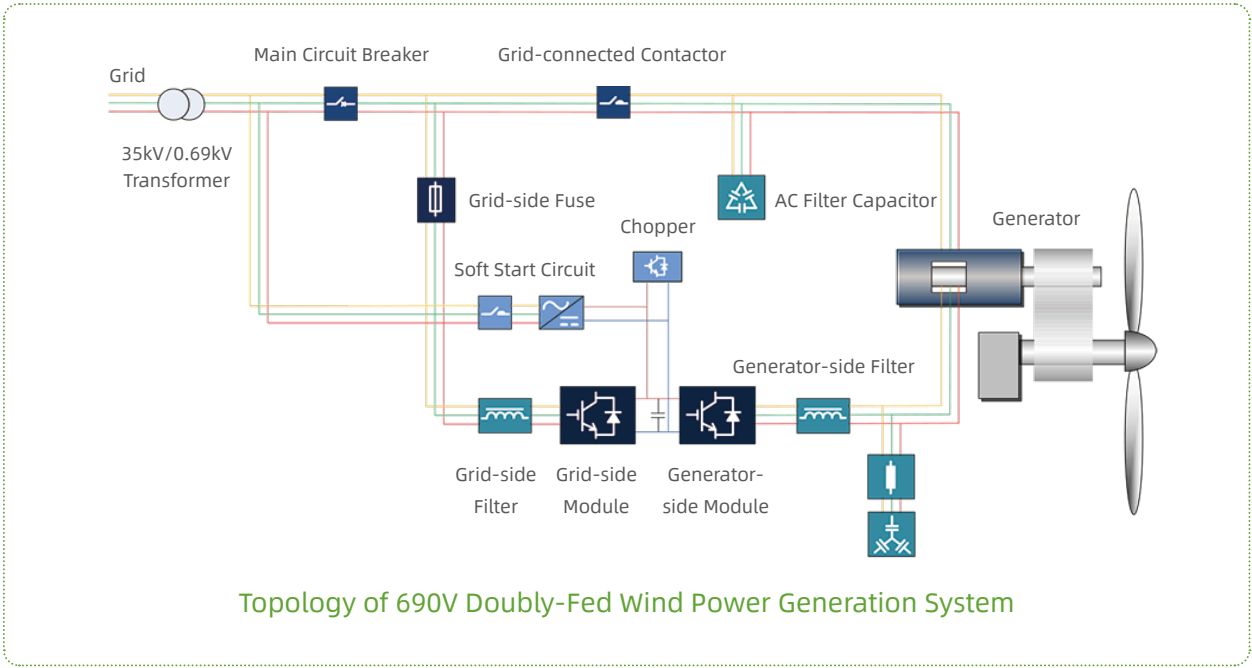

Hopewind



690V Air-Cooled Doubly-Fed Converter



Performance Characteristics

High Power Density

The power density is raised by 30%, improving turbine design flexibility.

Good Compatibility

Catering to market needs, the product supports the derivative integration with the master control unit and with the turbine auxiliary transformer.

Standardization of Parts

Key components of the whole series of converters, such as grid-connected contactors and fans, are standardized to reduce parts categories.

Optimized Heat Dissipation Design

The optimized heat dissipation layout inside the cabinet, together with external fans, enhances the converter's environmental adaptability.

Higher Efficiency

The filter design is optimized to reduce the grid-side excitation current and the rotor's excitation current, thereby lowering converter losses.

Remote Monitoring and Intelligent Diagnosis

The remote network system of the converter can intelligently diagnose wind turbine faults.


Technical Specifications

Power	1.5MW	2.0MW	2.5MW	3.0MW	3.6MW	4.5MW	5.6MW	6.25MW
Parameters								
Operating Voltage	552V~759V ^①							
Rated Current	1527A	2036A	2545A	3083A	3670A	4600A	5676A	6312A
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz ^②							
Grid-side Maximum Continuous Current	305A	420A	550A	650A	750A	1250A	1500A	1500A
Grid-side Overload Current (1min/10min)	336A	462A	605A	715A	825A	1375A	1650A	1650A
Generator-side Frequency	0Hz~20Hz							
Generator-side Maximum Continuous Current	580A	800A	1000A	1100A	1250A	1400A	1800A	2000A
Generator-side Overload Current (1min/10min)	638A	880A	1100A	1210A	1375A	1540A	1980A	2200A
Grid Voltage Harmonic Tolerance	≤5%							
Grid Voltage Imbalance Tolerance	≤8%							
System Efficiency	≥97%							
Noise	<82dB							
Operating Temperature	-40°C to +50°C (45°C to 50°C derated)							
Storage Temperature	-40°C to +70°C							
Altitude	Standard Type: ≤3000m; Plateau Type: 3000m~5000m ^③							
Cooling Mode	Air Cooling							
Ingress Protection	IP23							
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines -test Procedure of Voltage Fault Ride Through Capability							
Dimensions (W*H*D) (mm)	2000*2200*600				3000*2200*600			

① The product is capable of running at 1.3 times the high voltage.
② For other frequencies, consult Hopewind.
③ For solutions applicable to an altitude higher than 4000m, consult Hopewind.
* ①②③ are applicable to the whole doubly-fed converter series.

690V Liquid-Cooled Doubly-Fed Converter

13

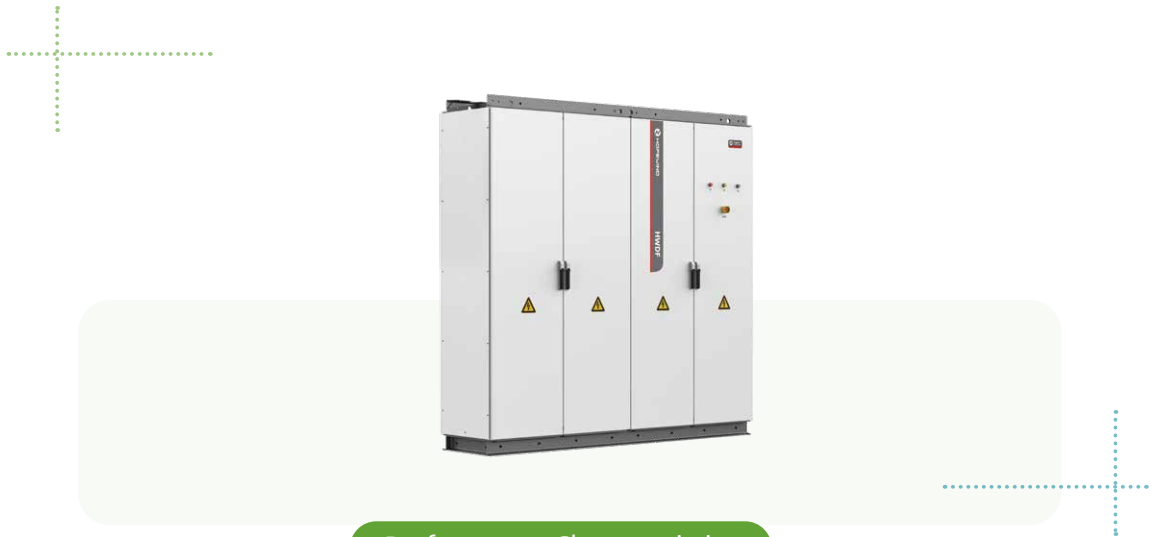

Performance Characteristics

● High Power Density

The maximum unit power is up to 6.XMW and the power density is raised by 100%.

● High Reliability Design

The product's high IP rating makes it particularly suitable for highly saline and misty, polluted, and humid environments.

● Flexible Layout

The block-style design supports flexible arrangement and facilitates the expansion into one converter unit integrated with master control unit/liquid cooler.

● Lightweight Parts

A single power module weighs 11kg, and the maximum weight of wearing parts does not exceed 20kg, making it convenient for one-person maintenance.

● Customized Inlet and Outlet

The cable entry of the grid, stator, and rotor can be customized to meet diverse requirements of the tower base and nacelle.

● Remote Monitoring and Intelligent Diagnosis

The remote network system of the converter can intelligently diagnose wind turbine faults.

Technical Specifications

Parameters \ Power	2.0MW	2.5MW	3.2MW	4.2MW	5.0MW	6.25MW
Operating Voltage	552V~759V					
Rated Current	2036A	2545A	3279A	4257A	5089A	6312A
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz					
Grid-side Maximum Continuous Current	420A	550A	700A	1250A	1250A	1500A
Grid-side Overload Current (1min/10min)	462A	605A	770A	1375A	1375A	1650A
Generator-side Frequency	0Hz~20Hz					
Generator-side Maximum Continuous Current	800A	1000A	1250A	1400A	1600A	2000A
Generator-side Overload Current (1min/10min)	880A	1100A	1375A	1540A	1760A	2200A
Grid Voltage Harmonic Tolerance	≤5%					
Grid Voltage Imbalance Tolerance	≤8%					
System Efficiency	≥97%					
Noise	<70dB					
Operating Temperature	Ambient Temperature: -40°C to +50°C; Liquid Inlet Temperature: +5°C to +55°C (50°C to 55°C derated)					
Storage Temperature	-40°C to+70°C					
Altitude	Standard Type: ≤3000m; Plateau Type: 3000m~5000m					
Cooling Mode	Liquid Cooling					
Ingress Protection	IP54					
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines-test Procedure of Voltage Fault Ride Through Capability					
Dimensions (W*H*D) (mm)	2300*2200*650				2400*2200*600	

690V Doubly-fed

950V/1140V Doubly-Fed Converter

The Hopewind **Low-Voltage Three-Level Doubly-Fed Converter** is designed to work with 950V/1140V doubly-fed generators in wind power generation systems. Utilizing a type-i three-level topology, it operates at a system voltage level of 950V/1140V, with IGBTs as the core power electronic devices. As the generator speed varies with wind speed, the converter controls the rotor's excitation to adjust its magnetic field. This ensures that the frequency, phase, and amplitude of the generator's output voltage align with the grid, achieving variable-speed constant-frequency power generation. Additionally, the converter can fine-tune the generator's frequency, active power, and reactive power by adjusting the frequency, amplitude, and phase of the rotor's excitation current.



Hopewind utilizes multiple patented technologies to provide doubly-fed wind power converters in a range of specifications, featuring a rated voltage of 950V/1140V and a rated frequency of 50Hz/60Hz. Hopewind owns complete independent intellectual property rights over these products.

- 1

■ Power Range

3.XMW~20.0MW
- 2

■ Cooling Mode


Air Cooling
Liquid Cooling
- 3

■ Application Environment

Standard Type
Plateau Type
Low Temperature Type
Coastal Type
Offshore Type
- 4


■ Stator Voltage

The stator voltage range can be raised, for example, the medium voltage solution is available for the stator.

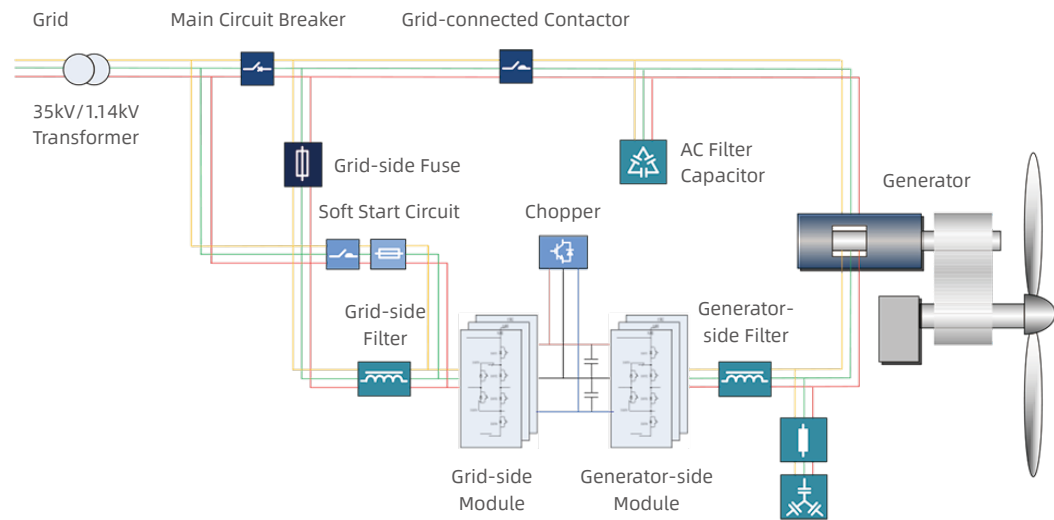

Topology of 950V/1140V Doubly-Fed Wind Power Generation System

Hopewind

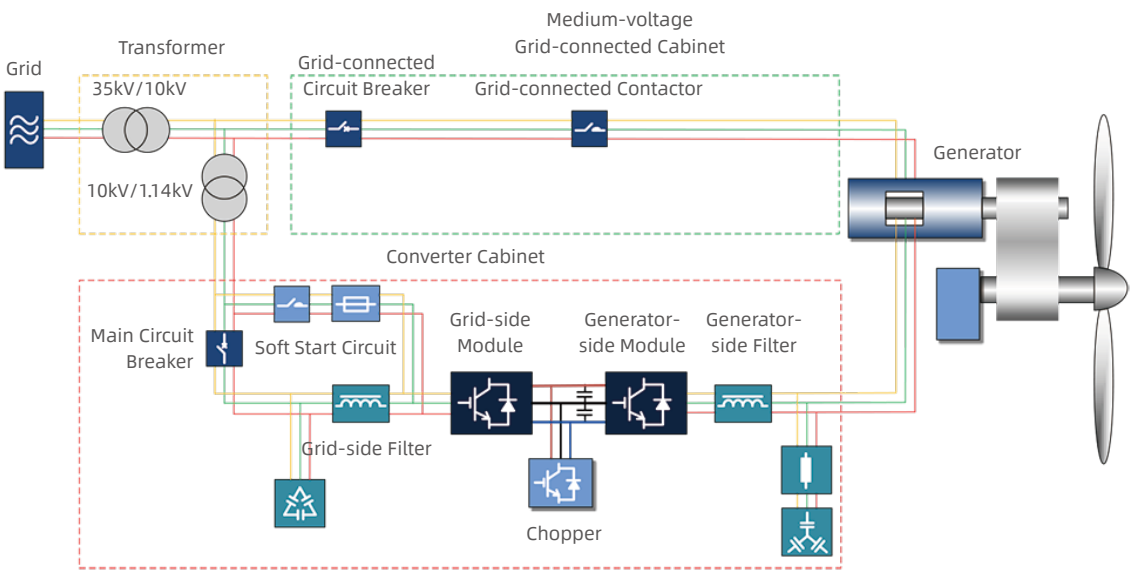

Topology of Doubly-Fed Wind Power Generation System with 10kV Medium-Voltage Stator

950V/1140V Air-Cooled Doubly-Fed Converter



Performance Characteristics

● Mature Design

Hopewind has over 10 years of experience in the development and application of three-level systems, along with a mature supply chain. The product shares many similarities with the 690V system.

● Platform-Based Design

The product is built on the 690V system platform, featuring a uniform structural layout and cabling design. This ensures a seamless transition in turbine upgrading design.

● Excellent Power Quality

The converter uses a three-level topology solution, with more output levels and lower harmonic content.

● Lower Conversion losses

Reduced current due to voltage decreases lowers the heat generated by the converter, thereby reducing the cooling demands on the tower.

● Better Cost-Effectiveness

With generator power design bottlenecks addressed and internal cable usage reduced within the turbine, the overall cost of the turbine system is lowered.

● Remote Monitoring and Intelligent Diagnosis

The remote network system of the converter can intelligently diagnose wind turbine faults.

Technical Specifications

Parameters	Power	3.XMW	4.XMW	5.XMW	6.XMW	7.XMW	8.XMW	10.0MW	12.0MW
Operating Voltage	855V~1045V	1026V~1254V							
Rated Current	2950A	2460A	2962A	3436A	3821A	4620A	5212A	6100A	7286A
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz								
Grid-side Maximum Continuous Current	515A	480A	480A	600A	600A	700A	800A	900A	1000A
Grid-side Overload Current (1min/10min)	567A	528A	528A	660A	660A	770A	880A	990A	1100A
Generator-side Frequency	0Hz~20Hz								
Generator-side Maximum Continuous Current	900A	650A	1000A	1100A	1200A	1400A	1600A	1800A	2000A
Generator-side Overload Current (1min/10min)	990A	715A	1100A	1210A	1320A	1540A	1760A	1980A	2200A
Grid Voltage Harmonic Tolerance	≤5%								
Grid Voltage Imbalance Tolerance	≤8%								
System Efficiency	≥98%								
Noise	<82dB								
Operating Temperature	-40°C to +50°C (45°C to 50°C derated)								
Storage Temperature	-40°C to +70°C								
Altitude	Standard Type: ≤3000m; Plateau Type: 3000m~5000m								
Cooling Mode	Air Cooling								
Ingress Protection	IP23								
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines-test Procedure of Voltage Fault Ride Through Capability								
Dimensions (W*H*D) (mm) ^①	2000*2200*600	2700*2200*600 2000*2200*700	2800*2200*600 2000*2200*700	3000*2200*600 2000*2200*700	4200*2200*600 3000*2200*700				

① For dimensions of the doubly-fed converter with the medium-voltage stator, consult Hopewind.

950V/1140V Liquid-Cooled Doubly-Fed Converter



Performance Characteristics


- High Reliability Design**
The product's high IP rating makes it particularly suitable for highly saline and misty, polluted, and humid environments.
- Flexible Layout**
The block-style design allows for flexible arrangement and easy expansion into a single converter unit integrated with a master control unit and liquid cooler.
- Easy to Maintain**
Compact, modular, and lightweight core components reduce the workload for maintenance technicians.
- Customized Cable Entry**
The cable connection points for the grid, stator, and rotor can be customized to meet the diverse requirements of the tower base and nacelle.
- Remote Monitoring and Intelligent Diagnosis**
The remote network system of the converter can intelligently diagnose wind turbine faults.

Technical Specifications

Parameters \ Power	5.0MW~6.0MW	8.0MW~10.0MW	12.0MW~18.0MW	19.0MW~20.0MW
Operating Voltage	855V~1045V	1026V~1254V		
Rated Current	3696A~4407A	4917A~6100A	7404A~10959A	11551A~12143A
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz			
Grid-side Maximum Continuous Current	950A~1100A	700A~900A	1000A~1300A	1400A~1500A
Grid-side Overload Current (1min/10min)	1045A~1210A	770A~990A	1100A~1430A	1540A~1650A
Generator-side Frequency	0Hz~20Hz			
Generator-side Maximum Continuous Current	1000A~1250A	1500A~1800A	2000A~2600A	2800A~3000A
Generator-side Overload Current (1min/10min)	1100A~1375A	1650A~1980A	2200A~2860A	3080A~3300A
Grid Voltage Harmonic Tolerance	≤5%			
Grid Voltage Unbalance Tolerance	≤8%			
System Efficiency	≥98%			
Noise	<80dB			
Operating Temperature	Ambient Temperature: -30°C to +50°C; Liquid Inlet Temperature: +5°C to +55°C (50°C to 55°C derated)			
Storage Temperature	-40°C to +70°C			
Altitude	Standard Type: ≤3000m; Plateau Type: 3000m~5000m			
Cooling Mode	Liquid Cooling			
Ingress Protection	IP54			
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines-test Procedure of Voltage Fault Ride Through Capability			
Dimensions (W*H*D) (mm) ^①	2500*2200*600	2800*2200*650	4500*2200*650	5000*2200*650

① For dimensions of the doubly-fed converter with the medium-voltage stator, consult Hopewind.

1800V Stator MV Liquid-Cooled Doubly-Fed Converter

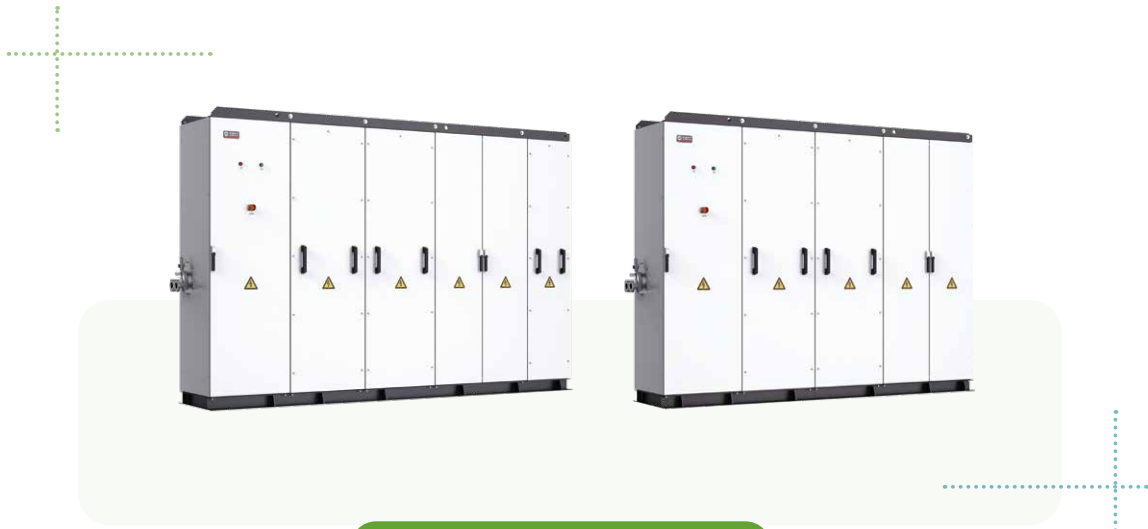

Performance Characteristics

- Classical and Mature Design**
The product solution adopts a classic, mature three-level platform, drawing upon over 10 years of converter research, development and application experience within this field.
- High Reliability Design**
The product’s high IP rating makes it particularly suitable for highly saline and misty, polluted, and humid environments.
- Flexible Power Expansion**
The block-style design allows for flexible arrangement and easy expansion of the power
- High Power Density**
Compact unit design facilitate a good power density, the small size and footprint is suitable for both tower base and nacelle location
- Better Cost-Effectiveness**
Higher stator voltage facilitates reduced current, thereby lowering cable costs and consequently decreasing the overall cost of wind turbines.

Technical Specifications

Parameters	Power	11.0MW~20.0MW
Operating Voltage		1620V~1980V
Grid-side Frequency		50Hz ~ 60Hz (±5Hz)
Grid-side Maximum Continuous Current		800A~1200A
Grid-side Overload Current (1min/10min)		880A~1320A
Generator-side Frequency		0Hz~20Hz
Generator-side Maximum Continuous Current		1600A~2400A
Generator Side Overload Current (1min/10min)		1760A~2640A
Grid Voltage Harmonic Tolerance		≤5%
Grid Voltage Imbalance Tolerance		ε≤8% for short term ε≤5% for a long period of time
System Efficiency		≥98%
Noise		<80dB
Operating Temperature		-40°C to +50°C (derated at 45°C to 50°C)
Storage Temperature		-40°C~+70°C
Usage Scenarios		Offshore / Onshore
Cooling Mode		Liquid Cooling
Ingress Protection		IP54
Fault Voltage Ride Through (FVRT)		Meet the national standard "GBT19963.2-2024 technical regulations for wind farm integration into power system part 2: offshore wind Power"
Dimensions (W*H*D) (mm) ^①		3100*2200*650 3600*2200*650 (with optional grounding switch)

① For the detailed dimensions of the stator 1800V double-fed converter, please consult HOPEWIND.

690V Full-Power Converter

The Hopewind **HWFP069 Series Full-Power Converters** are designed for use with permanent magnet synchronous generators (PMSG), electrically excited synchronous generators (EESG), or squirrel-cage induction generators (SCIG) in wind power generation systems. Each converter comprises a generator-side converter and a grid-side converter, connected by a DC bus. The generator-side converter connects to the generator's stator, enabling variable-speed constant-frequency control for optimal power generation efficiency. It transfers power to the grid-side converter via the DC bus. The grid-side converter connects to the grid, providing high-quality power and balancing the voltages on both sides of the DC bus. The full-power converter ensures a seamless grid connection with zero impact and features superior fault voltage ride-through capability, facilitating a grid-friendly match with the generator. Additionally, the grid-side converter excels in active power, reactive power, and voltage regulation capabilities.




Hopewind utilizes multiple patented technologies to provide full-power wind power converters in a range of specifications, featuring a rated voltage of 690V and a rated frequency of 50Hz/60Hz. Hopewind owns complete independent intellectual property rights over these products.


1 ■ Power Range
1.0MW~12.0MW

2 ■ Cooling Mode
Liquid Cooling

3 ■ Application Environment
Standard Type
Plateau Type
Low Temperature Type
Coastal Type
Sea-based Type

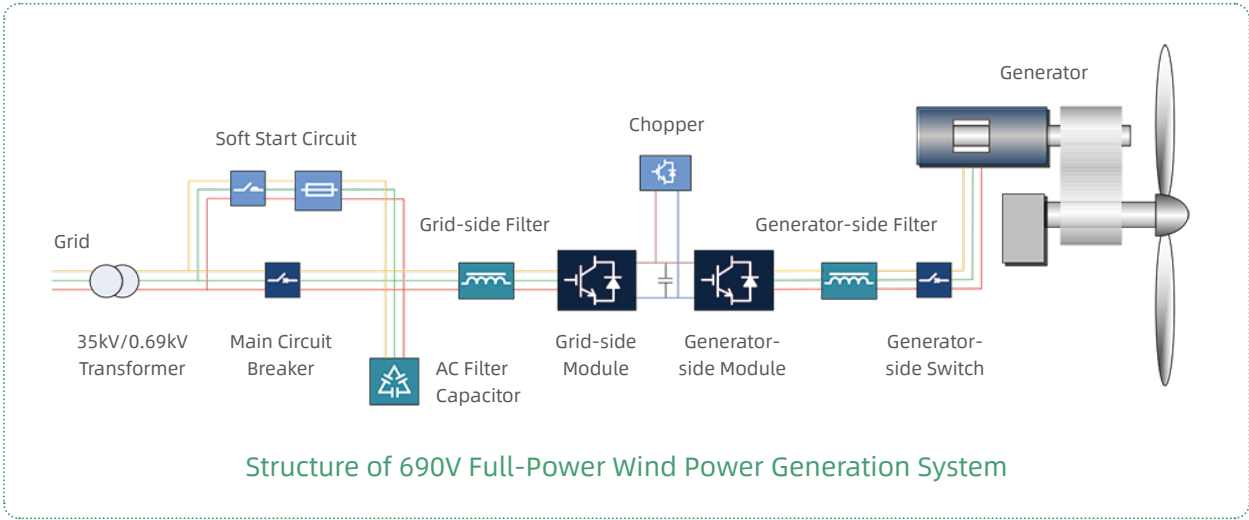

690V Full-Power Converter

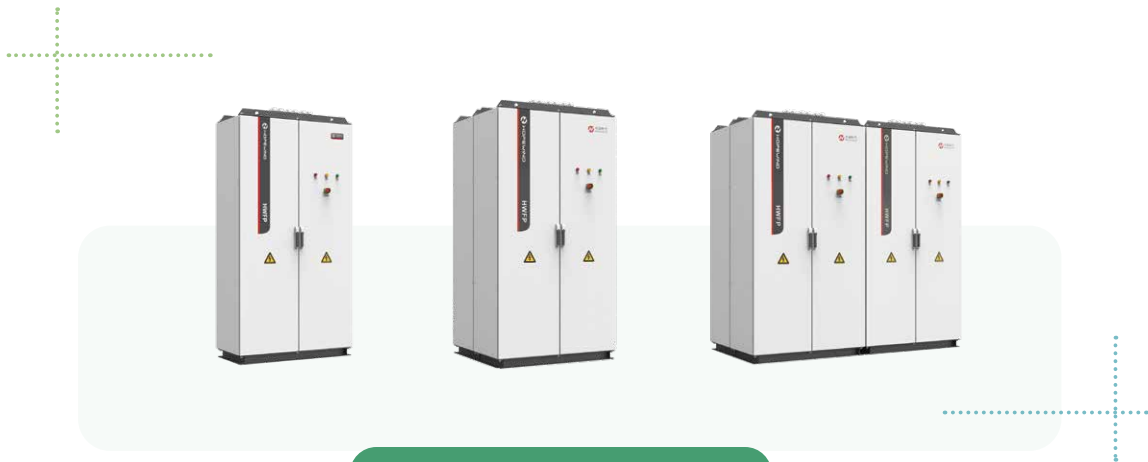

Performance Characteristics

High Power Density

The adoption of a new-generation power layout pattern increases power density by 100%.

System Fault Redundancy

Faulty modular converters can be removed while remaining online, minimizing power generation losses due to converter faults.

System Design Redundancy

When multiple high-power modular converters are paralleled, one modular converter serves as a backup and is ready to replace a faulty converter at any time.

Control System Redundancy

The innovative control system architecture, configured with dual control systems, achieves online redundancy backup for the control system.

Low-Power Switch-In

Different numbers of modular converters are used for different power ranges of the turbine to improve converter efficiency at low power.

Special Design for Offshore Applications

Extensive experience in offshore applications, featuring robust protection against corrosion, moisture, condensation, and mildew.

Energy-Saving Standby Mode

The energy-saving standby mode reduces losses during standby periods for both the converter and liquid cooling system, enhancing the owner's power generation revenue.

Remote Monitoring and Intelligent Diagnosis

The remote network system of the converter can intelligently diagnose wind turbine faults.

Technical Specifications

Power Parameters	1.0MW	1.5MW	1.6MW	2.0MW~ 3.2MW	3.3MW~ 4.5MW	4.6MW~ 6.XMW	6.0MW~ 8.XMW	12.0MW
Operating Voltage	552V~759V ^①			2 Connected in Parallel	3 Connected in Parallel	4 Connected in Parallel	6 Connected in Parallel	8 Connected in Parallel
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz ^②							
Grid-side Maximum Continuous Current	1000A	1500A	1600A					
Grid-side Overload Current (1min/10min)	1100A	1650A	1760A					
Generator-side Frequency	1Hz~100Hz ^③							
Generator-side Maximum Continuous Current	1000A	1500A	1600A					
Generator-side Overload Current (1min/10min)	1100A	1650A	1760A					
Grid Voltage Harmonic Tolerance	≤5%							
Grid Voltage Imbalance Tolerance	≤8%							
System Efficiency	≥97%							
Noise	<70dB							
Operating Temperature	Ambient Temperature: -30°C to +50°C; Liquid Inlet Temperature: +5°C to +55°C (50°C to 55°C derated)							
Storage Temperature	-40°C to +70°C							
Altitude	Standard Type: ≤3000m, Plateau Type: 3000m~5000m ^④							
Cooling Mode	Liquid Cooling							
Ingress Protection	IP54							
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines -test Procedure of Voltage Fault Ride Through Capability							
Dimensions (W*H*D) (mm)	1200*2200*600							

① The product is capable of running at 1.3 times the high voltage.
② For other frequencies, consult Hopewind.
③ For solutions applicable to a frequency higher than 100Hz, consult Hopewind.
④ For solutions applicable to an altitude higher than 4000m, consult Hopewind.
* ①②③④ are applicable to the whole converter series.

900V/950V/1140V Full-Power Converter

The Hopewind **Low-Voltage Three-Level Full-Power Converter** is designed for use with 900V, 950V, or 1140V permanent magnet synchronous generators (PMSG) or squirrel-cage induction generators (SCIG) in wind power generation systems. It utilizes a type-I three-level topology and operates at a system voltage level of 900V, 950V, or 1140V, with IGBTs as the core power conversion modules. This converter system comprises a generator-side converter and a grid-side converter, connected via a DC bus. The generator-side converter connects to the generator's stator, enabling variable-speed constant-frequency control to ensure optimal power generation efficiency. It transfers power to the grid-side converter through the DC bus. The grid-side converter connects to the grid, delivering high-quality power while balancing the voltages on both sides of the DC bus. The full-power converter facilitates a seamless grid connection with zero impact and features superior fault voltage ride-through capability, ensuring a grid-friendly integration with the generator. Additionally, the grid-side converter offers excellent capabilities in active power, reactive power, and voltage regulation.



Hopewind utilizes multiple patented technologies to provide full-power wind power converters in a range of specifications, featuring a rated voltage of 900V/950V/1140V and a rated frequency of 50Hz/60Hz. Hopewind owns complete independent intellectual property rights over these products.

- 1

■ Power Range


3.XMW~30.0MW
- 2

■ Cooling Mode

Liquid Cooling
- 3

■ Application Environment

Standard Type, Plateau Type
Low Temperature Type
Coastal Type
Offshore Type

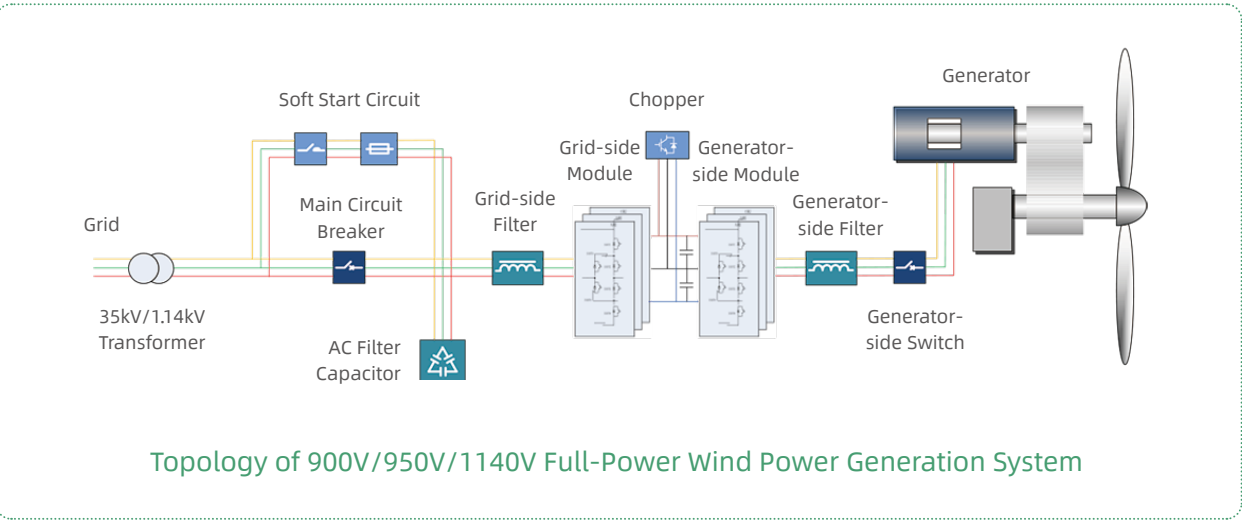

Topology of 900V/950V/1140V Full-Power Wind Power Generation System

Hopewind



900V/950V/1140V Full-Power Converter



Performance Characteristics

● Mature Design

Hopewind has over 10 years of experience in the development and application of three-level systems, along with a mature supply chain. The product shares many similarities with the 690V system.

● Excellent Power Quality

The converter uses a three-level topology solution, with more output levels and lower harmonic content.

● Higher Efficiency

The efficiency is as high as 98% under rated conditions, greatly increasing the turbine’s power generation revenue.

● Better Cost-Effectiveness

With generator power design bottlenecks addressed and internal cable usage reduced within the turbine, the overall cost of the turbine system is lowered.

● Efficient O&M

Modular, lightweight, and standardized component design simplifies assembly and maintenance, reducing material and spare parts costs.

● Energy-Saving Standby Mode

The energy-saving standby mode reduces losses during standby periods for both the converter and liquid cooling system, enhancing the owner's power generation revenue.

● Remote Monitoring and Intelligent Diagnosis

The remote network system of the converter can intelligently diagnose wind turbine faults.

Technical Specifications

Power Parameters	1.5MW (Power Cabinet)	1.8MW (Power Cabinet)	2.2MW (Power Cabinet)	3.X~ 4.4MW	4.X~ 6.6MW	6.X~ 8.8MW	9.X~ 13.0MW	12.X~ 17.0MW	18.X~ 26.0MW	24.X~ 30.0MW
Operating Voltage	1026V~1254V			2 Power Cabinets Connected in Parallel	3 Power Cabinets Connected in Parallel	4 Power Cabinets Connected in Parallel	6 Power Cabinets Connected in Parallel	8 Power Cabinets Connected in Parallel	12 Power Cabinets Connected in Parallel	16 Power Cabinets Connected in Parallel
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz									
Grid-side Maximum Continuous Current	900A	1060A	1300A							
Grid-side Overload Current (1min/10min)	990A	1166A	1430A							
Generator-side Frequency	1Hz~100Hz									
Generator-side Maximum Continuous Current	900A	1060A	1300A							
Generator-side Overload Current (1min/10min)	990A	1166A	1430A							
Grid Voltage Harmonic Tolerance	≤5%									
Grid Voltage Imbalance Tolerance	≤8%									
System Efficiency	≥98%									
Noise	<80dB									
Operating Temperature	Ambient Temperature: -30°C to +50°C; Liquid Inlet Temperature: +5°C to +55°C (50°C to 55°C derated)									
Storage Temperature	-40°C to +70°C									
Altitude	Standard Type: ≤3000m; Plateau Type: 3000m~5000m									
Cooling Mode	Liquid Cooling									
Ingress Protection	IP54									
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines -test Procedure of Voltage Fault Ride Through Capability									
Dimensions (W*H*D) (mm)	700*2200*650			Size A	Size B	Size C	Size D	2*Size C/ Size E	2*Size D	2*Size E

Hopewind power cabinets, distribution cabinets, and liquid cooling cabinets used in the low-voltage three-level full-power converter are all designed with standardized dimensions, allowing flexible layout combinations between cabinets.


The recommended dimensions for the 3.XMW~20.0MW converters are as follows:

Size A: 1400*2200*1300; Size B: 2100/1700*2200*1300; Size C: 2800/2400*2200*1300; Size D: 3500/3100*2200*1300; Size E: 4200*2200*1300

900V/950V/1140V
Full-power

3300V Full-Power Converter

The Hopewind **HW8000 Three-Level Medium-Voltage Wind Power Converter** is designed for use with medium-voltage permanent magnet synchronous generators (PMSG) in wind power generation systems. It employs diode-clamped three-level converter technology, providing a system voltage level of 3.3kV, with IGBTs as the core power conversion modules. The generator-side converter connects to the generator's stator, enabling variable-speed constant-frequency control to ensure optimal power generation efficiency. It transfers power to the grid-side converter via a DC bus. The grid-side converter connects to the grid, delivering high-quality power while balancing the voltages on both sides of the DC bus. The overall operation of the converters facilitates electromagnetic torque control and magnetic field control of the generator, converting wind energy into electrical energy.

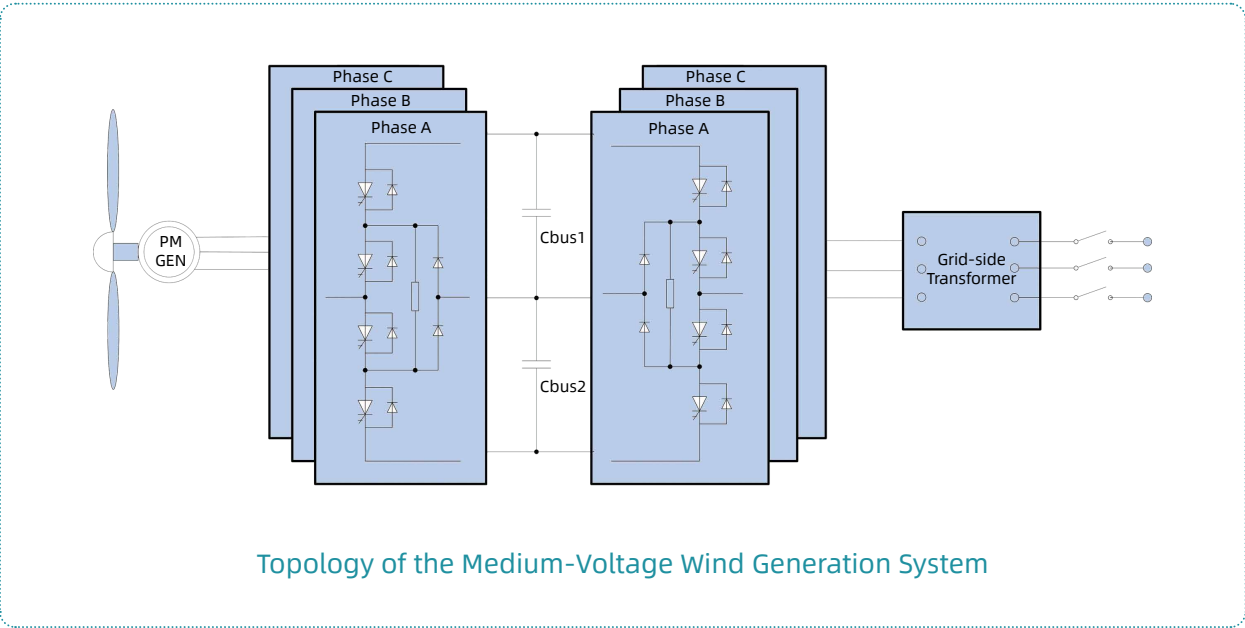

Standard Cabinet-Type Medium-Voltage Wind Power Converter

- The IGBT three-level topology design ensures higher efficiency, high power density, and low heat loss.
- IGBTs provide an overload capacity up to 150% and the short-term overload capacity is ten times more than that of IGBTs.
- IGBTs feature high reliability, crimp-on construction, and inherently low failure rate, eliminating the risk of "explosion".
- Modular design, block-style assembly, compact size, and light weight facilitate product disassembly and O&M.
- Liquid cooling, high power conversion efficiency, redundancy design of the cooling system, and deionized protection ensure reliable product operation for a longer time.
- The optimized notch filter design enhances the suppression of harmonics within a certain frequency domain, further improving the power quality.
- Container-type medium-voltage wind power converters can be equipped based on customer requirements, to provide better protection.
- Remote monitoring and intelligent diagnosis: The remote network system of the converter can intelligently diagnose wind turbine faults.



Container-Type Integrated Medium-Voltage Wind Power Converter

In offshore wind power applications, high humidity, high salt, and demanding maintenance conditions challenge wind turbine generator systems (WTGSs). To address this, a container structure can be adopted for the medium-voltage wind power converter used in offshore wind power generation systems, with the entire converter and its auxiliary equipment housed inside the container.

Performance Characteristics

- A standard container is used to standardize the outer platform design for the tower.
- It is deployed on the outer platform of the tower base to help optimize the tower design and costs.
- The reliable sealing, along with the converter's robust protection, ensures safe operation.
- Remote monitoring and intelligent diagnosis: The remote network system of the converter can intelligently diagnose wind turbine faults.



Technical Specifications

Parameters \ Power	5.0MW	6.0MW	7.0MW	8.0MW	10.0MW	12.5MW
Grid-side Operating Voltage	3000V~3600V					
Grid-side Frequency	47.5Hz~52.5Hz / 57Hz~63Hz					
Grid-side Maximum Continuous Current	1112A	1334A	1556A	1750A	2022A	2426A
Grid-side Overload Current (1min/10min)	1334A	1601A	1867A	2134A	2224A	2669A
Generator-side Frequency	1Hz~100Hz					
Generator-side Maximum Continuous Current	1112A	1334A	1556A	1750A	2022A	2426A
Generator-side Overload Current (1min/10min)	1334A	1601A	1867A	2134A	2224A	2669A
Grid Voltage Harmonic Tolerance	≤5%					
Grid Voltage Imbalance Tolerance	≤8%					
System Efficiency	≥98%					
Noise	≤80dB					
Operating Temperature	Ambient Temperature: -30°C to +50°C; Liquid Inlet Temperature: +5°C to +55°C (50°C to 55°C derated)					
Storage Temperature	-40°C to +70°C					
Altitude	≤1000m					
Cooling Mode	Liquid Cooling					
Ingress Protection	IP54					
Fault Voltage Ride Through (FVRT)	In compliance with the Wind Turbines-test Procedure of Voltage Fault Ride Through Capability					
Dimensions (W*H*D) (mm)	3600*2200*2300					

Supporting Products

Pitch Control System
Mobile Test Platform-Multi-Functional
Power Grid Simulator


Pitch Control System

Based on the PMD100, the system utilizes a customized permanent magnet synchronous generator, supercapacitor module, or lithium battery module. The Hopewind PMC pitch control system is characterized by its simple architecture, high safety and reliability, and ease of maintenance.



Integrated High-Voltage Pitch Control System

The Hopewind Integrated High-voltage Pitch Control System features Hopewind’s independently developed dedicated pitch driver, which offers motor control, signal collection, grid monitoring, backup power charging monitoring, and more. This design greatly simplifies conventional pitch control systems, resulting in a simpler internal structure with fewer failure points and significantly enhanced reliability compared to traditional DC pitch control systems. The integrated pitch control system provides comprehensive fault protection, backup power health management, high/low voltage ride-through, and startup heating and dehumidifying functions. These features improve system reliability and availability while ensuring turbine safety.

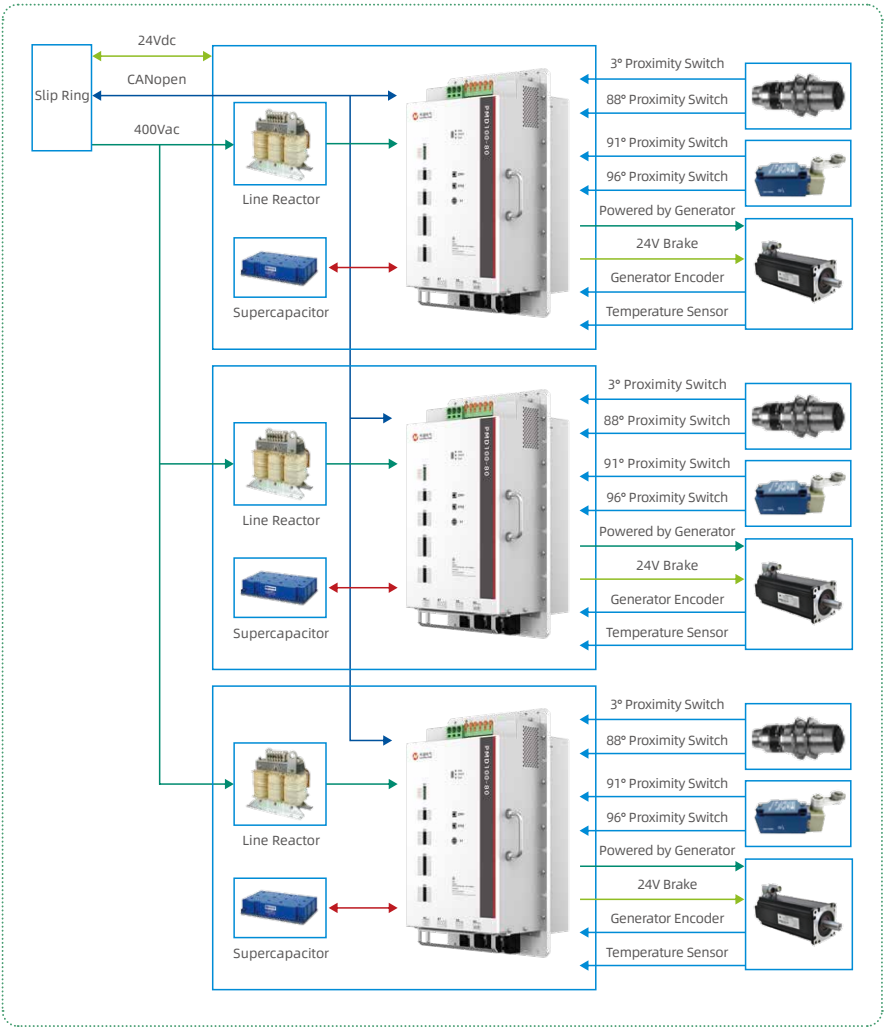

Pitch Control System

Product Characteristics

1 ■ High Integration

The PMD100-based Pitch Control System reduces 30% of components and cables, decreasing failure points and failure rates.

3 ■ Strong Environmental Adaptability

The system, with its broad operating temperature range (−40°C to +60°C), can function in extreme temperatures, high altitudes, and salt mist exposure. Additionally, its strong grid adaptability ensures compliance with low/high voltage ride through requirements.

2 ■ Flexible and Easy to Use

The open and safe control platform, based on a built-in PLC and a wind power pitch application library, enables fast secondary development to meet diverse application requirements.

4 ■ High Safety and Reliability

The hardware + software redundant safe feathering policy, together with the built-in hub speed detection and protection unit, guarantees the turbine unit’s safety.

Technical Specifications

Type		Value
Operating Environment	Operating Ambient Temperature	−30°C to +55°C (ambient temperature for the hub)
	Shutdown Storage Temperature	−40°C to +70°C
	Relative Humidity	≤95%
	Altitude	≤4000m, derating design required for altitude > 2000m
	Vibration Environment	5Hz~150Hz, with an acceleration of 10m/s ²
	Corrosion Resistance Class	C3 / C4
	Ingress Protection	IP54
Input AC Power Supply	Input Voltage	400VAC, 3L+N+PE
	Fluctuation Range	−20% to +35%
	Input Frequency Range	45Hz~66Hz
	Harmonic Content	<5%
Three-axis Blade Angle Synchronization Deviation		≤1°
Position Control Accuracy		Up to 0.01°
0.01° Step Response Time		≤100ms
Adapted Wind Turbine Power		1MW~20MW

Integrated Pitch Driver

Hopewind PMD100 Integrated Pitch Driver offers comprehensive functionalities including generator control, CodeSys application programming, 24VDC power, backup power charging and discharging, high/low-voltage holding brake for the generator, and diverse IO signal interfaces. The driver can meet the pitch control requirements of WTGSs with maximum power of 20MW.



Performance Characteristics

- **High Integration**
The driver integrates the rectifier and inverter, 24VDC power module, supercapacitor charging/discharging, low-voltage holding brake, high-voltage holding brake, open programming platform, rich I/O interfaces, braking component, and other modules.
- **High-Precision Detection of the supercapacitor**
High-precision current and voltage measurement and advanced energy algorithms are used to detect the capacity of the supercapacitor.
- **Large-Capacity Auxiliary Power Output**
The built-in large-capacity switch mode power supply provides rated 3A power output, which can meet the power supply requirements of pitch lubrication pumps.
- **Parallel Connection of Dual Drivers**
Two PMD100 drivers can be connected in parallel to drive a single generator or dual generators through fast buses inside the drivers, meeting the pitch drive requirements of 8MW~20MW WTGSs.
- **Strong Adaptability to Grid**
The normal operating voltage range is 320VAC to 540VAC, and the operating frequency range is 45Hz to 66Hz.The driver can safely pitch under a surge impact of 170%Un and protect internal components against damage.
- **Open and Safe Control Platform**
The control platform using the ARM+DSP architecture provides users with sufficient flexibility for application control programming. The DSP program ensures safe pitching control in case of abnormal circumstances, guaranteeing the safety of WTGSs.
- **Comprehensive Backup Power Solutions**
The driver is equipped with a built-in supercapacitor and a lithium battery management software module, which allow users to easily charge or discharge the backup power supply, and manage its status.
- **Flexible Configuration Based on User Needs**
Natural cooling components or air cooling heat dissipation components can be provided. CANopen/Ethernet communication interfaces can be provided.Built-in or external braking resistors can be selected.

Pitch Control System

Interface Type

Interface Type	PMD100-50	PMD100-80
Generator Encoder	1 (RDC / TTL)	1 (RDC)
Blade Encoder	1 (SSI)	
Bus Communication Interface	1 (CANopen)	
Safety DI	1	2
Safety Relay	1	2
D/DO/AI	20 / 10 / 3	20 / 12 / 3
PT100 Detection	4	
Generator Temperature Detection	1 (KTY / PTC / PT1000)	
Commissioning Interface	Ethernet	

Technical Specifications

Type	PMD100-50	PMD100-80
Rated Input Voltage	400Vac	
Input Voltage Range	320VAC~540VAC	
Rated Output Current	50AAC	80AAC
Peak Output Current	130Aac (3s)	280Aac (3s)
DC Bus Operating Voltage	150V~800V	
Charging Output Voltage	0V~500V	
Charging Output Current	0~5A	0~8A
Low-voltage Holding Brake Output	24V / 4A	24V / 6A
High-voltage Holding Brake Output	150-300V / 0.7A	
24V Power Output	3A	6A
Operating Temperature	-30℃ to +60℃	-40℃ to +60℃
Altitude	≤3000m	≤4000m
Ingress Protection	Inside Cabinet: IP20 / C3 Outside Cabinet: IP54 / C4	Inside Cabinet: IP20 / C3-H Outside Cabinet: IP54 / C5-M

Custom Permanent Magnet Synchronous Generator

- High precision, fast response, low heat generation, high reliability
- Compact size, light weight, easy maintenance and replacement



Lithium Battery Solution



Based on high-reliability lithium battery cells and BMS, Hopewind PBM125-2000 Lithium Battery Module has the following characteristics:

1 ■ Large Discharge Current

The permanent discharge current is -60A and the peak discharge current is -200A.

2 ■ Good Temperature Adaptability

It can run reliably in the range of -40℃ to +60℃ under heating conditions.

3 ■ Large Storage Capacity

10% partial discharge can meet the energy demand for single pitching.

4 ■ High Cost-Effectiveness

In high-power turbines, especially offshore WTGSs, it can properly substitute for supercapacitors.

Pitch Control System

Remote Monitoring of Pitch

Older SCADA systems are insufficient for analyzing pitch faults effectively. To retrofit and upgrade the pitch control systems of older models, Hopewind offers a solution for remotely monitoring the pitch system. This solution allows comprehensive management and monitoring of the pitch systems for all wind turbines.

Product Characteristics

1 Independent Deployment

Older SCADA systems are insufficient for analyzing pitch faults effectively. To retrofit and upgrade the pitch control systems of older models, Hopewind offers a solution for remotely monitoring the pitch system. This solution allows comprehensive management and monitoring of the pitch systems for all wind turbines.

2 Failure Recording

The system boasts real-time fault alarm, history fault query, and fault waveform recording functions, and supports one-click export of fault data of one or more turbines.



Mobile Test Platform-Multi-Functional Power Grid Simulator

39

Product Overview

Hopewind's independently developed multifunctional power grid simulator supports the following functions: Precisely simulate various steady-state deviations and dynamic disturbances of power systems at different voltages and frequencies. Launch comprehensive grid adaptability test for different equipment under test such as wind, photovoltaic, and energy storage systems, covering voltage deviation, frequency deviation, three-phase voltage unbalance, voltage flicker, grid harmonics, interharmonics, etc. Accurately simulate characteristics of the grid such as low-voltage, high-voltage, and continuous fault conditions, including symmetrical and asymmetrical three-phase faults, to efficiently evaluate the transient support capability of equipment under test during grid fault ride through events. Simulate grid frequency fluctuation and voltage fluctuation curves to assess the dynamic support performance of the equipment under test when integrated into the grid. Inject disturbance voltages at a series of frequency points to automatically determine the broadband impedance characteristics of the equipment. Simulate phase angle jumps, weak grid conditions, and source/load interactions to meet the latest testing requirements for grid-forming equipment.

Functional Diversification

1 Grid Adaptability Tests

- Voltage Deviation
- Frequency Deviation
- Three-phase Voltage Imbalance
- Voltage Flicker
- Harmonic
- Interharmonic

2 Grid Voltage Fault Ride Through Tests

- LVRT
- HVRT
- Continuous Ride-throughs

3 Grid Support Tests

- Primary frequency control
- Inertia response
- Impedance characteristic test
- Weak grid connection test

Product Types

1 Low Voltage & Small Capacity

500kVA/1MVA



2 Medium and High Voltage & Large Capacity

5MVA/6MVA/10MVA/
11MVA/15MVA/20MVA



3 High Voltage & Ultra-large Capacity

50MVA/60MVA/90MVA/
100MVA/150MVA



Note: The external silkscreen on the container can be customized by customers. The picture is for reference only.

Mobile Test Platform-Multi-Functional Power Grid Simulator

Performance Characteristics

- Supports customization for various voltage levels and testing functions
- Integrated isolation shock resistance, suitable for testing in weak grid environments
- Widely applied in wind power, PV, energy storage, hydrogen energy, and SVG testing scenarios
- Equipped with comprehensive power grid access protection devices, featuring robust fault protection capabilities
- The 32-bit DSP real-time intelligent control system ensures high accuracy in voltage waveform and rate of change control
- Supports parallel connection for capacity expansion


Technical Specifications

Parameter \ Power Lever	500kVA~1MVA	5MVA~20MVA	50MVA~150MVA
Input Voltage	AC 400V±10%	AC 35kV±10% AC 10kV±10%	AC 35kV±10%
Input Frequency	50Hz±5%		
Steady State Output Voltage Range	80~110%		
Steady State Voltage Accuracy	0.2% under rated voltage		
High Voltage Output Range	110~140%		
Low Voltage Output Range	0~90%		
Output Frequency Range	45~66Hz		
Output Frequency Accuracy	0.008Hz		
Output Waveform Distortion Rate	≤1%		
Three-phase Voltage Unbalance Output Range	1~10%		
Output Flicker-pst	1~10		
Output Harmonics/Interharmonics	1~2000Hz		
Overall Machine Efficiency	≥95%		
Noise	≤70dB	≤90dB	
Storage Temperature	-40~+70℃	-30~+55℃	
Operating Temperature	-30~+40℃	-25~+40℃	
Altitude	≤2000m		
Cooling	Liquid cooling	Air cooling	Liquid cooling / Air cooling


Note: Some functional parameters can be customized according to customer needs.

Industry Applications


1 ■ Example of the WTGS Test

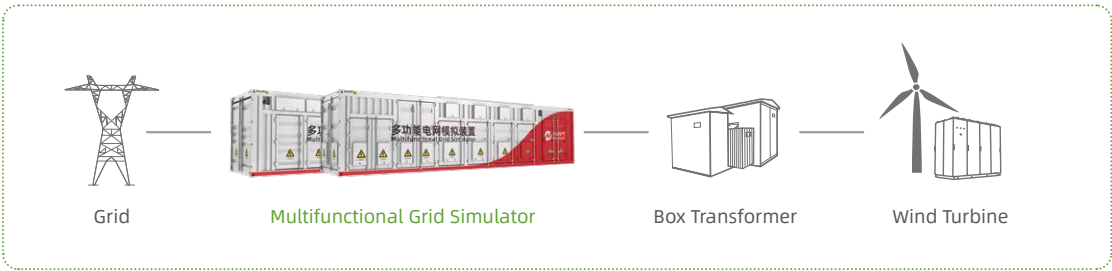

2 ■ Example of the Photovoltaic Power Generation Unit Testing

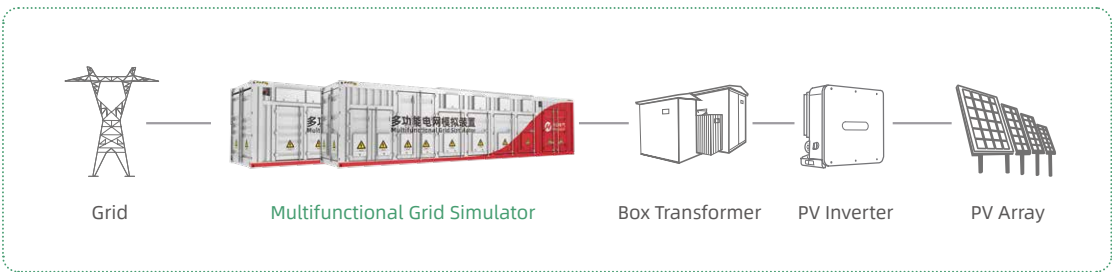

3 ■ Example of the Energy Storage System Test

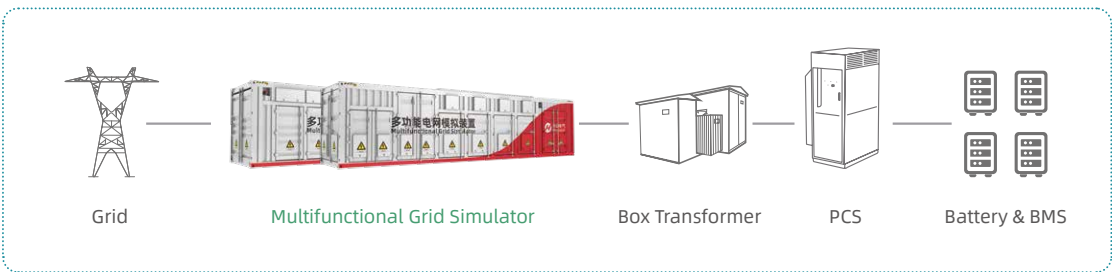

Remote O&M Products


hopeView Network Monitoring System

Special Functions

hopeView Network Monitoring System

43

The system monitors the network of wind power converters using an optical fiber ring network and servers within the wind farm. While ensuring power operation safety, it conducts precise monitoring and intelligent diagnosis of WTGSs based on a large volume of high-resolution real-time data collected by the converters. This approach maximizes the O&M efficiency of the wind farm, minimizes WTGS downtime, reduces power generation losses, and ultimately increases the power generation benefits of the wind farm.

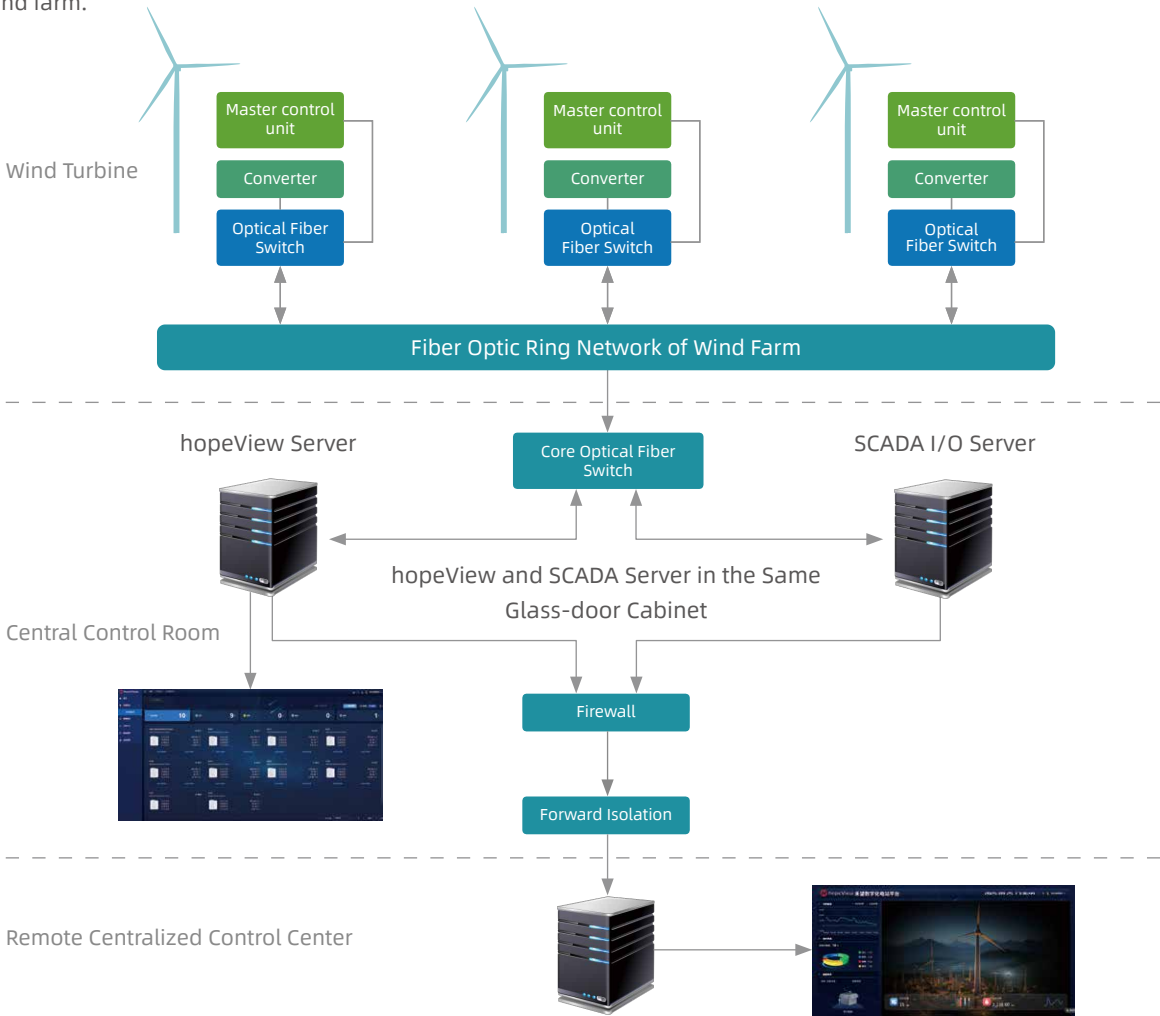

Performance Characteristics

- Wind farm-level operating status monitoring and operation trend analysis.
- Wind turbine-level real-time data monitoring with full coverage of important parameters and in-depth data analysis.
- Remote assistance in monitoring turbine power quality.
- Early warning for drive chain failures, aiding in fault diagnosis.
- Remote oscilloscope function for electrical faults, providing in-depth data.
- Fast identification of power grid failures for immediate protection.
- Multi-dimensional customized reports with comprehensive and intuitive wind farm statistics.
- Multi-directional and multi-level monitoring and comparison to identify optimization opportunities.

Benefits

- Converter faults can be resolved with a single access to the wind turbine, following fault diagnosis and handling suggestions.
- Maintenance and preventive measures can be implemented in advance based on trend predictions to prevent fault escalation.
- Targeted maintenance can be conducted based on fault statistics to improve maintenance efficiency.
- It helps train professional maintenance teams and reduces the dependency on converter manufacturers.

Special Functions

01

Operation Data Monitoring


High-Precision Multi-Variable Data Acquisition

When compared with a typical SCADA system, Hopeview data collection function has the following characteristics:

- A Large Amount of Data Collected

 - Real-time electrical parameters (over 100) of all wind turbines can be displayed.
 - Real-time electrical parameters (over 2000) of a single wind turbine can be displayed in detail.
 - As many as 10 million event records and more than 100,000 fault waveform records can be stored.
- High Resolution for Key Data

 - The resolution of data before and after faults can reach 3kHz.
 - For specified data, real-time collection and waveform drawing and recording can be done at a resolution of 1.5kHz.
 - For data that requires long-term tracking, historical trends can be plotted at a resolution of seconds.

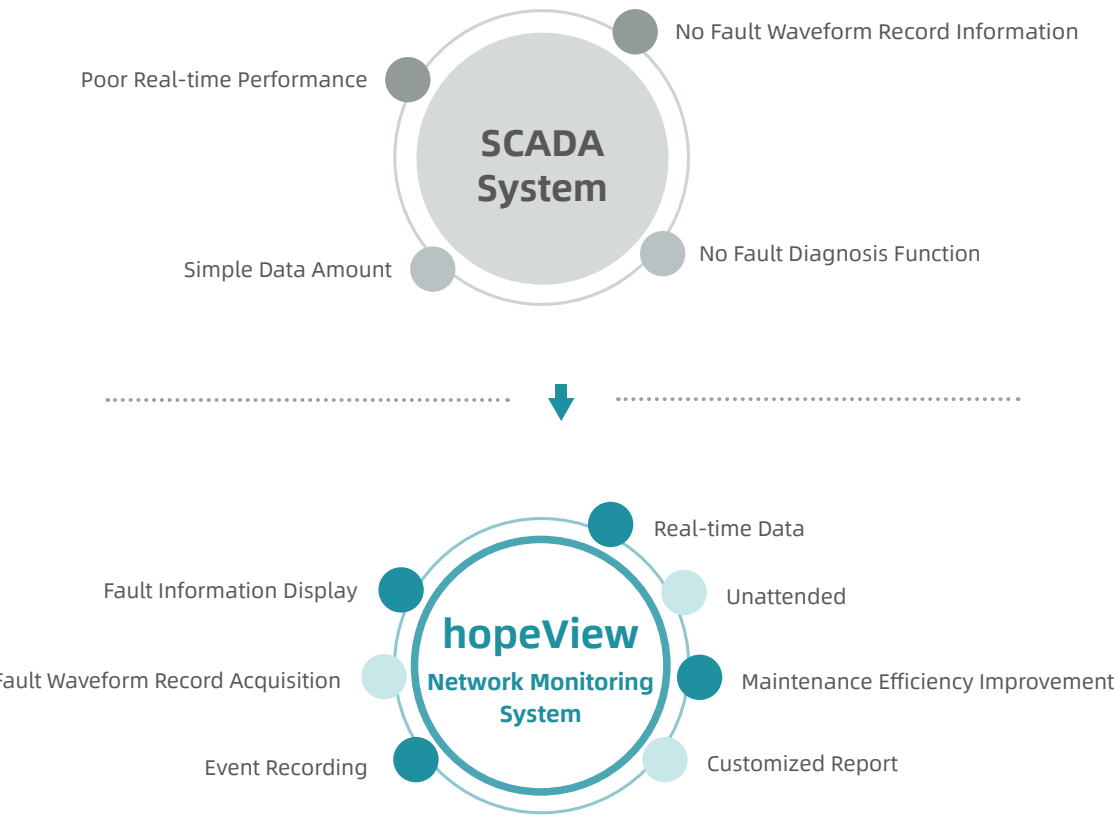

02

Intelligent Fault Diagnosis

In-Depth Data Analysis

Based on deep computing and years of maintenance experience, Hopewind has developed two intelligent fault diagnosis methods for WTGSS:

- 1
- Fault Diagnosis Guide


The system provides a technical expert analysis case summary, known as a case analysis library.



- 2
- Intelligent Fault Diagnosis and Prediction

Automated fault analysis, no manual intervention required

 - Fault diagnosis:** Professional analysis is conducted on fault waveform records, event records, and other information to rapidly and accurately pinpoint fault causes.
 - Trend prediction:** The system monitors specific parameter trends using specialized algorithms to detect hidden risks, enabling timely preventive measures.

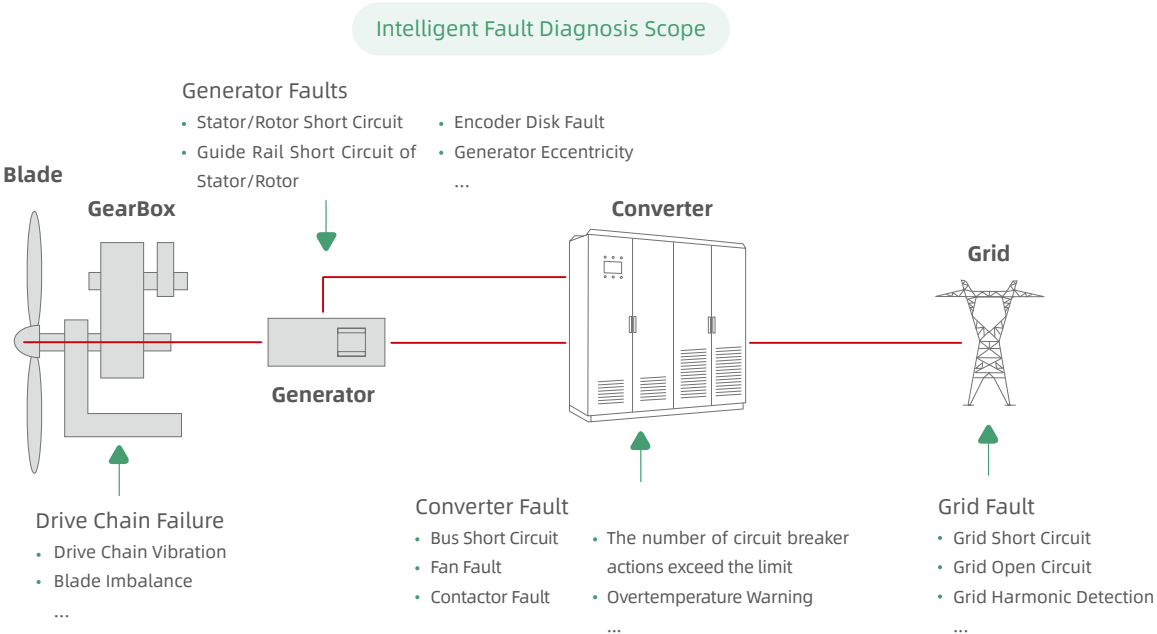

Special Functions


Intelligent
Diagnosis
and Display

In-Depth Data Analysis

Production
Management
Function

Featured Data Statistics

By monitoring and comparing power curves and power generation from multiple perspectives, the HopeView Network Monitoring System provides real-time insights into the operation of the wind farm and its equipment. It assists in identifying optimization areas, improving power generation, and enhancing the overall operation of the wind farm.

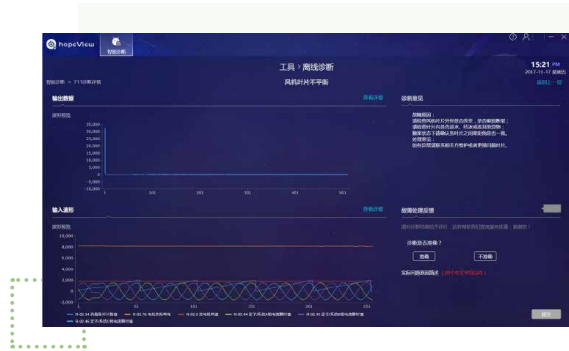

1 Intelligent Blade Imbalance Diagnosis



2 Intelligent Diagnosis of Generator-Side Short Circuit



3 Intelligent Diagnosis of Grid Outage



4 Intelligent Diagnosis of Encoder Disk Signal Loss




The system supports fault statistics functions, collecting data on faults semi-monthly, monthly, quarterly, semi-yearly, and yearly. It generates fault statistics reports and ranks the faults. The system also collects statistics on frequent faults of the wind farm or wind turbines over a specific period and conducts targeted optimizations to improve the operation of the wind turbines.



Converter faults that rank top in the wind farm in a certain period of time are displayed.

Comparison of Display Device Parameters

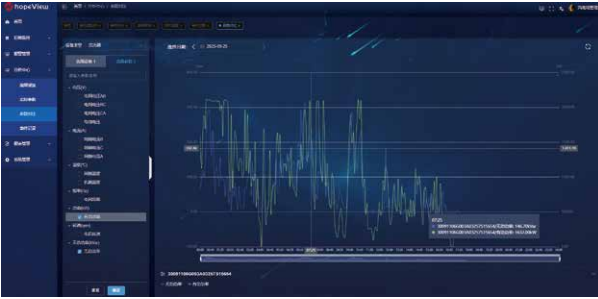

Featured Projects



Batch Application of Offshore Wind Power Converters

- Time: 2016 to present
- Locations: Jiangsu (Rudong, Binhai, Hai'an, Dafeng, Qidong), Guangdong (Zhanjiang, Yangjiang, Jieyang, Zhuhai), Fujian (Xinghua Bay, Fuqing, Pingtan, Changle), Zhejiang (Daishan, Jiaxing, Shengsi, Yuhuan, Cangnan, Xiangshan), Shanghai (Lingang), Liaoning (Zhuanghe), Shandong (Dongying)
- Introduction: Over 1,000 sets of Hopewind offshore converters have been installed successively and are operating stably to date in highly humid, saline, and misty environments with frequent thunderstorms.



Batch Operation of Wind Power Converters Outside China

- Time: 2012 to present
- Locations: Lubbock Wind Farm, Texas, USA; Progreso Wind Farm, Yucatan Peninsula, Mexico; Ulyanovsk Wind Farm, Russia; Activity Wind Farm, Russia; Aysha II Wind Farm, Ethiopia; PEPL Project, India; Ninh Thuan Zhengsheng Wind Farm, Vietnam
- Introduction: Hopewind actively participates in global wind power construction, and has installed over 200 sets of high-power wind power converters in multiple countries across the Americas, Europe, Africa, and Asia since 2012. These converters operate reliably and stably, earning high praise from global owners.



- Time: 2009 to present
- Locations: Cuomeizhegu Ultra-high-altitude Wind Farm in Tibet; Xuebangshan Wind Farm in Dali, Yunnan; Shazhuyu Wind Farm in Gonghe, Qinghai, and Xueshan Highland Wind Farm in Huidong, Sichuan
- Introduction: In Cuomeizhegu Wind Farm in Tibet (at an altitude of 5,000 meters), Xuebangshan Wind Farm in Dali, Yunnan (at an altitude of 3,800 meters), Shazhuyu Wind Farm in Gonghe, Qinghai (at an altitude of 3,500 meters), and Xueshan Wind Farm in Huidong, Sichuan (at an altitude of 3,300 meters), over 1,000 sets of Hopewind plateau-type (3,000~4,000 meters)/ ultra-plateau-type (above 4,000 meters) converters have been installed successively. Each of these have been successfully connected to the grid for power generation and have maintained stable operation since installation.



- Time: 2013
- Location: Summer Camp, Holingol, Inner Mongolia
- Introduction: The Holingol Summer Camp Wind Farm of State Power Investment Corporation is located in Summer Camp, Holingol, Inner Mongolia. It is a typical demonstration project for distributed wind power on-site consumption. The average altitude at the site is 1,100 meters, with long and cold winters as well as ice and snow accumulation. WTGSs operate in harsh conditions at a temperature as low as -25°C throughout the year. The wind farm has a gross installed capacity of 300MW and all the generators use Hopewind 2.0MW plain-type distributed low-temperature doubly-fed converters.



- Time: 2016
- Location: Xinhua Wind Farm, Tongyu County, Jilin Province
- Introduction: A sub-synchronous resonance event occurred in the Zhangjiakou power grid in 2014, causing almost all the wind turbines in the area to disconnect from the grid. Hopewind developed the "enhanced grid adaptability function" to successfully resolve the problem. In 2016, sub-synchronous resonance also occurred at Xinhua Wind Farm in Tongyu, Jilin Province. Only the wind turbines equipped with Hopewind converters remained connected to the grid and continued operation after the event occurred.



- Time: 2009
- Location: Sanmenxia Wind Farm in Henan Province
- The customer had been troubled by frequent tripping and disconnection of wind turbines due to severe grid imbalances caused by passing electric trains. The introduction of Hopewind converters in the wind farm successfully resolved this issue.

180 GW⁺

SHIPMENTS WORLDWIDE



Email: marketing@hopewind.com

Tel: +86 189 4874 2347

Website: www.hopewind.com

©2025 Hopewind Electric Co., Ltd. All rights reserved. V4.4.3

If the product size and parameters have changed, the latest actual product shall prevail